


Directions for use:

To remove spots: Shake HG "spot stain remover" well and pour it over the areas to be treated. In case of severe staining this product can be used undiluted. For less severe staining HG "spot stain remover" can be diluted to a maximum of 1:5 with (preferably) warm water. Scrub with a stiff broom or a brush. Leave to penetrate for 5 to 10 minutes and then rinse with plenty of water. For very absorbent surfaces the treatment may need to be repeated once or twice. To remove epoxy grouting residues: Shake HG "spot stain remover" well before using and apply undiluted. Scrub briefly and then leave to penetrate for about 20 minutes and scrub again. Rinse with plenty of water.

Attention: Transport and store the bottle upright. If the floors have a protective coating, that coating may also be removed by HG "spot stain remover". Apply (to the affected areas) a new protective coating after the treatment with HG "spot stain remover". Avoid spattering onto painted or varnished surfaces. Remove spilled liquid immediately with plenty of water. Ventilate well when using this product, 1.6% of the mixture consists of component(s) of unknown toxicity. . Medical personnel can request the data sheet via +31 (0)36 54 94 777 The consumer's information sheet can be obtained via www.HG.eu

MAINTENANCE? www.HG.eu

contains a.o.:	
aromatic hydrocarbons	> 30%
non-ionic surfactants	5-15%
anionic surfactants, phosphates	< 5%
preservation agents: 2-bromo-2-nitropropane-1,3-diol	

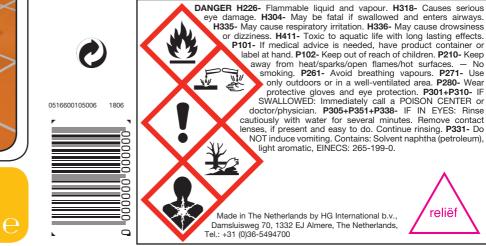



spot stain

| | (C

()